


PROTECTGUARD®

Wet Look

FLAT
OR
GLOSSY
FINISH

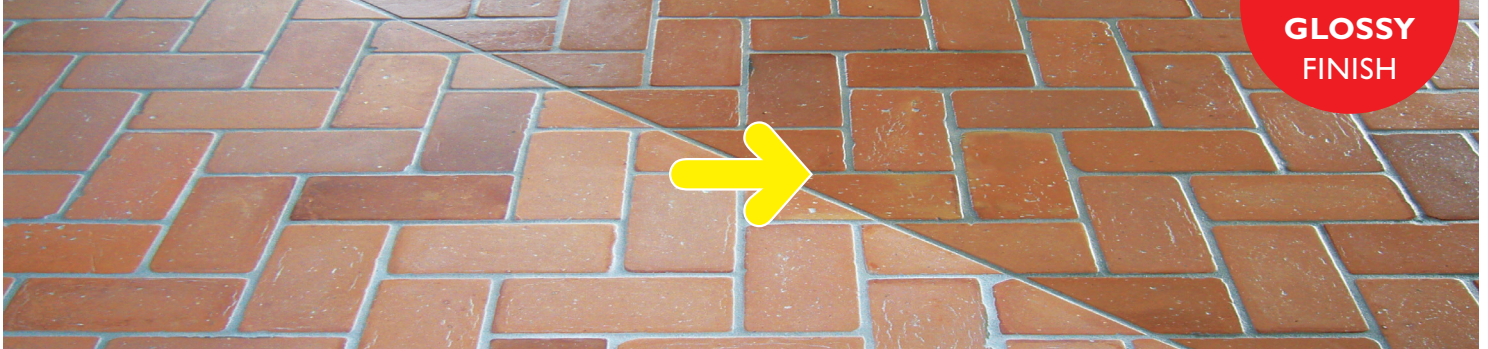

WATER / OIL REPELLENT AND ANTI-STAINING WITH WET FINISH TOTAL PROTECTION FOR POROUS MATERIALS

- PROTECTS AGAINST WATER, OIL AND STAINING
- ENHANCES THE ORIGINAL COLOUR
- WALLS & FLOORS
- AVAILABLE IN FLAT AND GLOSSY FINISH
- LETS THE SURFACE BREATHE
- UV AND FROST-RESISTANT
- INTERIOR & EXTERIOR

PRODUCT DESCRIPTION

ProtectGuard® **Wet Look** is designed to protect mineral porous building materials against water, oil and staining. It protects against the main causes of deterioration such as atmospheric pollution and grease-based stains. A surface treated with **ProtectGuard® Wet Look** will be easier to care for and will be protected over time.

ProtectGuard® Wet Look gives treated substrates a 'wet look' finish that enhances the original colour.


ProtectGuard® Wet Look allows the substrate to remain permeable to air and water vapour. It is UV-resistant and does not yellow.

USE

ProtectGuard® Wet Look can be applied to vertical, horizontal, to all porous or very porous materials such as natural stone, terracotta, brick, concrete, limestone... **ProtectGuard® Wet Look** is used for new and renovated constructions.

ADVANTAGES AND CHARACTERISTICS

- Protects against water and oily liquids.
- Anti-staining, anti-dirt.
- Makes cleaning easier.
- Lets a surface breathe.
- UV-resistant, does not yellow.
- Good resistance to abrasion.
- Available in flat or glossy finish.
- Ready to use.
- Non flammable.



ENVIRONMENT

Environment-friendly product:

- Water-based product.
- Petroleum solvent and silicone free.
- Non hazardous and non toxic.
- Biodegradable > 80%*.
- VOC = 52 g/l*.

CHEMICAL NATURE

Acrylic and fluor in aqueous phase.

CONTAINERS

1 and 5 litres cans.

TECHNICAL DATA

Physical state at 20 °C	: Liquid
Appearance	: Milky
Odour	: None
pH	: 8.5 ± 0.5
Boiling point [°C]	: 100 °C
Density	: 1.01 ± 0.01
Solubility in water [vol/vol]	: Total
Flash point [°C]	: Not applicable

HOW TO USE

Surface preparation :

- Apply the product to a surface that is clean, dust-free, grease-free and dry. To remove stains and marks of pollution use **Guard Wash® Express**. In case of greasy stains use **Guard Cleaner® Degreaser**. For efflorescence, laitance or concrete bloom use **Guard Remover® Efflorescence & Cement**.
- Rinse carefully until the surface is completely free from any cleaner marks and let dry 24/48 hours before applying the treatment.

Application :

- Use neat, do not dilute.
- Shake the product well before use.
- Always carry out a preliminary test.
- **ProtectGuard® Wet Look** can be applied in 2 layers.
- Apply the 1st layer to the surface.
- Let the product penetrate and dry (from 15 to 30 minutes according to the material's porosity and temperature) then apply the 2nd layer.
- **Do not over apply, eliminate any exceeding product before drying.**
- Drying time: 24 hours.
- Optimum effectiveness obtained after 5 to 7 days.

APPLICATION TOOLS

Apply using a roller or a brush.



MAINTENANCE

- Stubborn dirt should be cleaned off with clean water or with **Cleaner® Degreaser**.
- Following traffic-induced wear, the protection and 'wet-look' can be regenerated by re-applying **ProtectGuard® Wet Look** diluted with 50% of water.

COVERAGE

Coverage depends on the porosity of the material. The figures below should be used only as a general guideline:

6 to 10 m² / litre for 2 layers.

CLEANING YOUR EQUIPMENT

Clean tools and equipment immediately after use with water.

STORAGE

- Keep in a dry place (between 5°C and 30°C).
- Storage: 12 months following the production date when kept in the original unopened container.

RECOMMENDATIONS

- Remove all atmospheric pollution-related dirt from all surfaces to be treated before starting the treatment.
- **Always check the material's porosity and carry out a test first to ensure the finished result is acceptable.**
- For best results it is essential that **ProtectGuard® Wet Look** is used when the temperature of the substrates is between 10°C and 30°C.
- Do not apply during rain or in very hot weather. Air temperature between 5°C and 30°C.
- For very porous materials apply a first impregnation layer (**ProtectGuard® Wet Look** diluted with 20 to 30% of water).
- Do not mix with any other product.
- In certain cases, the product can slightly modify the slipperiness of the surface, always carry out a preliminary test.
- The intensity of «wet look» varies according to the nature of the material.
- Do not apply to terracotta that has already been treated with wax, linseed oil...

HEALTH AND SAFETY

- Respiratory protection : Under normal conditions of use where adequate ventilation is available, no special respiratory protection equipment is needed.
- Hand protection : Wear latex gloves.
- Skin protection : No special protective clothing or skin protection is required under normal conditions of use.
- Eye protection : If there is a real risk of splashing, wear protective goggles.
- If swallowed : Do not induce vomiting. Contact a doctor or a specialist.

KEEP OUT OF REACH OF CHILDREN

TECHNICAL SUPPORT

GUARD SPECIALITY PRODUCT LIMITED

Tel : +91 7829807395

E-mail : info@guardindustry.co.in

www.guardindustry.co.in



Important: The content of this documentation is based on our experience with the product. Guard Industry guarantees the quality of its products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Guard Industry products, or adverse weather conditions. For more information, consult the safety data sheet.

For the most recent version of our data sheet, visit our website www.guardindustry.com

Last updated : 20/02/2023